

OVERVIEW

Unmatched Timelessness

Loewen's Picture/Direct Set window is the definition of sleek design. These windows maximize views with minimal solid wood framework, resulting in a high-performing product with an unmatched aesthetic. Offered in a variety of shapes and sizes, they are the perfect complement to any style of architecture.

STANDARD JAMB DEPTHS

Cutdown Jamb Sizes: 4"

Full Jamb Sizes: 4-9/16"

Jamb Extension Sizes: 5-9/16", 6-1/16", 6-9/16",

7-9/16", 10-9/16"

Additional jamb extension sizes available.

SIZING

Max Standard: 70 sq ft w/ 8mm Glass (ex. 70-7/8" x 141-3/4")


Min Standard: 11-13/16" x 11-13/16"

Custom sizes that do not fit into our standard size matrix are also available.



HIGHLIGHTED FEATURES & BENEFITS

EXTERIOR GLAZED Exterior glazing eliminates interior stops for a clean, step-free look, serves as a value-engineered alternative to Timber Curtain Wall in combinations, and allows large sealed units to be installed from the building's exterior. DISCRETE DRAINAGE This system protects sill and jamb parts while evacuating water SYSTEM efficiently without compromising the exterior aesthetic. **OPTION FOR EMBEDDED** Embedded steel allows combinations to withstand wind loads without increasing mull dimensions, emphasizing the Picture/Direct Set as a 1/4" STEEL value-engineered alternative. ROBUST SIZES AND This direct set accommodates 3800 mm jambs vertically or CONFIGURATIONS horizontally, limited only by glass size, and features universal frame cladding making this a flexible offering that integrates with other Loewen products. **CONTEMPORARY CLADDING** Loewen's contemporary cladding enhances the Picture/Direct Set window, enabling contemporary drywall returns and a lower-profile exterior.

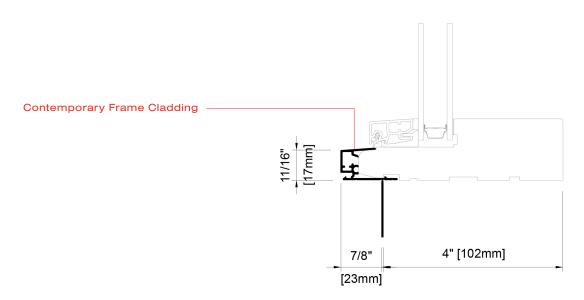

Visit Loewen.com or talk to your local dealer for a comprehensive education on what makes our Picture/Direct Sets the obvious choice in today's architectural market.



LOEWEN FUNDAMENTALS

Our highly customizable product offering is engineered for uncommon strength and durability

- Extruded aluminum cladding is intricately detailed, withstanding serious impact without sustaining damage.
- 2. Integral aluminum nailing flange ensures a secure installation and added weather protection.
- 3. Coastal Douglas Fir for strength and rigidity.
- Laminated wood components for enhanced structural stability and a tight weather seal.

- Minimal design is free from interior glazing stops for a clean aesthetic, unit is exterior-glazed for easier on-site installation of oversized glass units
- 6. No metal-to-glass contact improves energy efficiency.
- 7. 1/2" airspace is the optimum performance-spec when using an Argon Gas fill.